

ALVARO

made in Italy



ALVARO snc

Via Campagnola, 32 - 23854 Olginate (LC) - ITALY

Tel. +39 0341 645 539

e-mail: info@alvarosnc.com


www.alvarosnc.com



LitREMSas

UAB „LITREMSAS“
Manufaktūrų g.16
LT – 11342 Vilnius
Tel.: (+370 5) 26 00 627
Faksas: (+370 5) 26 00 845
El. p.: litremsas@gmail.com
www.litremsas.lt
www.trubogib.by

STAKLES IR IRANKIAI DIRBTI SU VAMZDŽIAIS

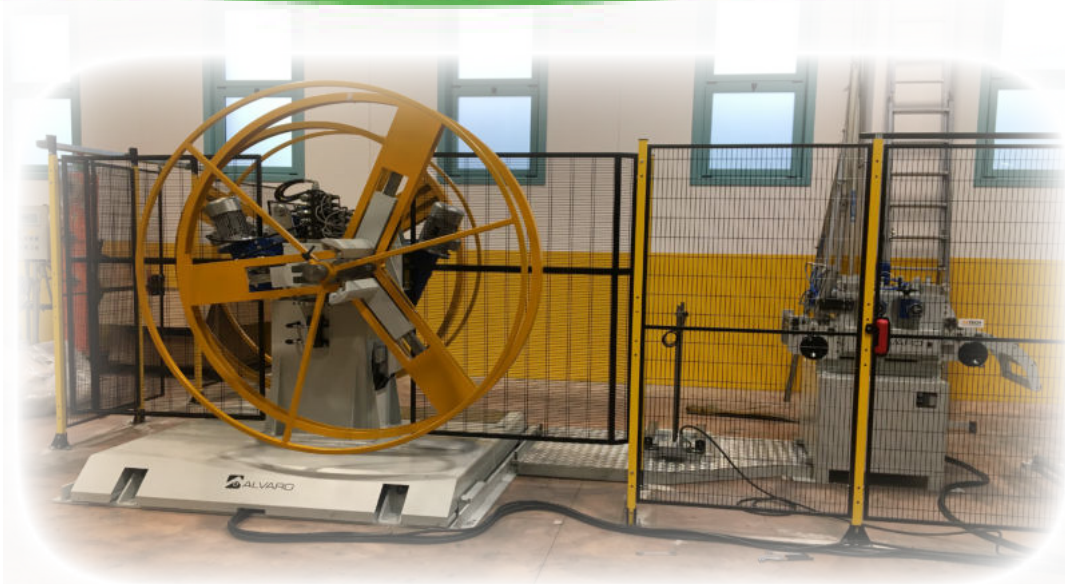

Alvaro s.n.c. was founded by former employees of the Cattaneo company in Olginate and is specialized in the manufacturing of decoilers, strip straighteners, feeders as well as complete feeding lines for presses. Thanks to the extensive experience gained in this sector we are able to produce decoilers, strip straighteners, feeders and complete feeding lines for presses providing a high quality level which enables us to look at the future with confidence and with a strong commitment to meeting our customers' requirements according to the motto "We put our skills at your service".

1 MOTORIZED DECOILER
UNMOTORIZED DECOILER
DOUBLE MOTORIZED DECOILER

2 STRIP STRAIGHTENER/ FEEDING
MOTORIZED STRIP STRAIGHTENER

3 FEEDER UNIT

4 UNIT

5 PNEUMATIC SHEAR
HYDRAULIC SHEAR
CUTTER LINE

6 SPECIAL MACHINES

7 COMPACT FEEDER LINE

8 TRADITIONAL FEEDER LINE

9 NOTCHING LINE



1 ASM- ASF - ASMD

MOTORIZED DECOILER

UNMOTORIZED DECOILER

DOUBLE MOTORIZED DECOILER

CAPACITY KG

600
1000
1500
2000
3000
4000
5000

OUTER DIAMETER

1300
1300
1300
1400
1600
1600
1600

EXPANSION JAWS

300-600
350-650
350-650
350-650
400-650
470-570
470-570

OPTIONS:

- Hydraulic pressure arm
- Pneumatically hydraulic pressure arm
- Cradle of load fixed
- Variable speed with inverter
- Hydraulic translation
- Unwinding arm

ASM - ASF - ASMD

MOTORIZED DECOILER

UNMOTORIZED DECOILER

DOUBLE MOTORIZED DECOILER



2 RMA-RM

STRIP STRAIGHTENER/FEEDING
MOTORIZED STRIP STRAIGHTENER

WIDTH	THICKNESS	DIAMETER	NR. REELS
35 200	0,3-1,5 mm	35 mm	8+6
35 400	0,3-1,5 mm	35 mm	8+6
35 600	0,3-1,5 mm	35 mm	8+6
35 800	0,3-1,5 mm	35 mm	8+6
60 200	0,6-3 mm	60 mm	2+9+2
60 400	0,6-3 mm	60 mm	2+9+2
60 600	0,6-3 mm	60 mm	2+9+2
60 800	0,6-3 mm	60 mm	2+9+2



WIDTH

80 200
80 400
80 600
80 800

THICKNESS

3-5 mm
3-5 mm
3-5 mm
3-5 mm

DIAMETER

35-60-80-100 mm
35-60-80-100 mm
35-60-80-100 mm
35-60-80-100 mm

NR. REELS

2+9+2
2+9+2
2+9+2
2+9+2

OPTIONS:

- Pneumatic head's opening for the cleaning of the reels
- Ultrasonic loop-control
- Hydraulic opening of the head to release
- Introduction group boards
- Automatic straightener
- Motorized rised stand



3 ALM FEEDER

WIDTH

80 200
80 400
40 600
80 800

THICKNESS

0,4-1,5 mm
0,4-1,5 mm
0,4-1,5 mm
0,4-1,5 mm

95 200
95 400
95 600
95 800

0,4-3 mm
0,4-3 mm
0,4-3 mm
0,4-3 mm



SRC 4

DECOILER COMBINED WITH STRIP STRAIGHTENER

WIDTH

120
200
300

THICKNESS

0,6-3 mm
0,6-3 mm
0,6-3 mm

NR. REELS

6+5
6+5
6+5

DIAMETER

60
60
60



5 CP - CH

PNEUMATIC SHEAR
HYDRAULIC SHEAR
CUTTER LINE




SPECIAL MACHINES


HORIZONTAL DECOILER

TIPPER DECOILER



6

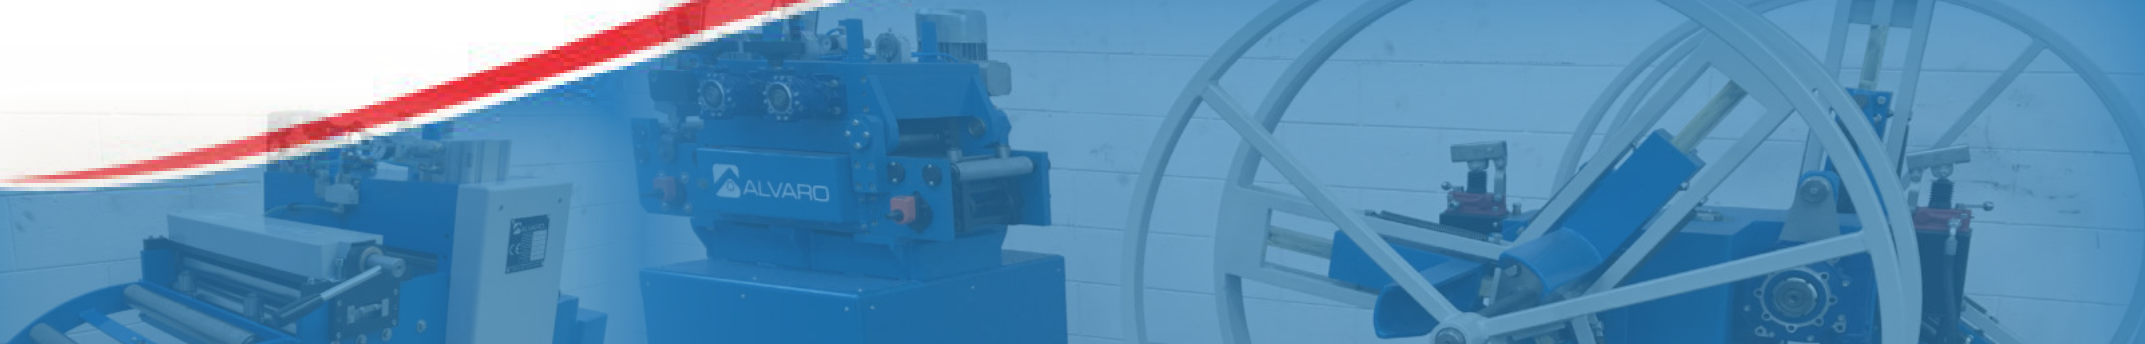

7 COMPACT FEEDER LINE

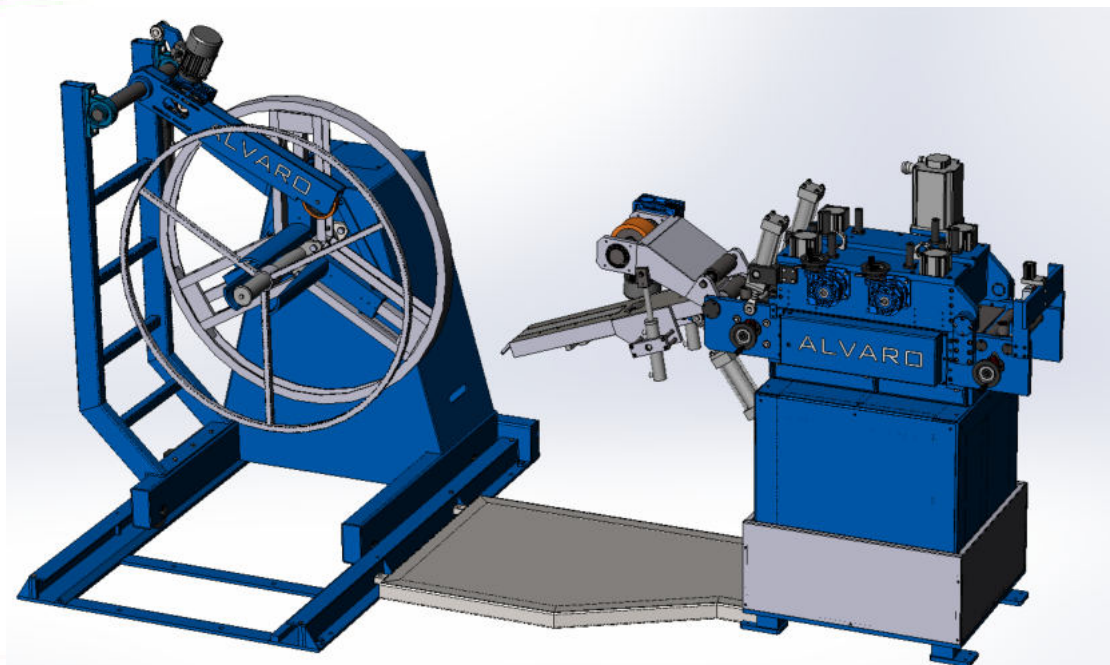

TRADITIONAL FEEDER LINE 8

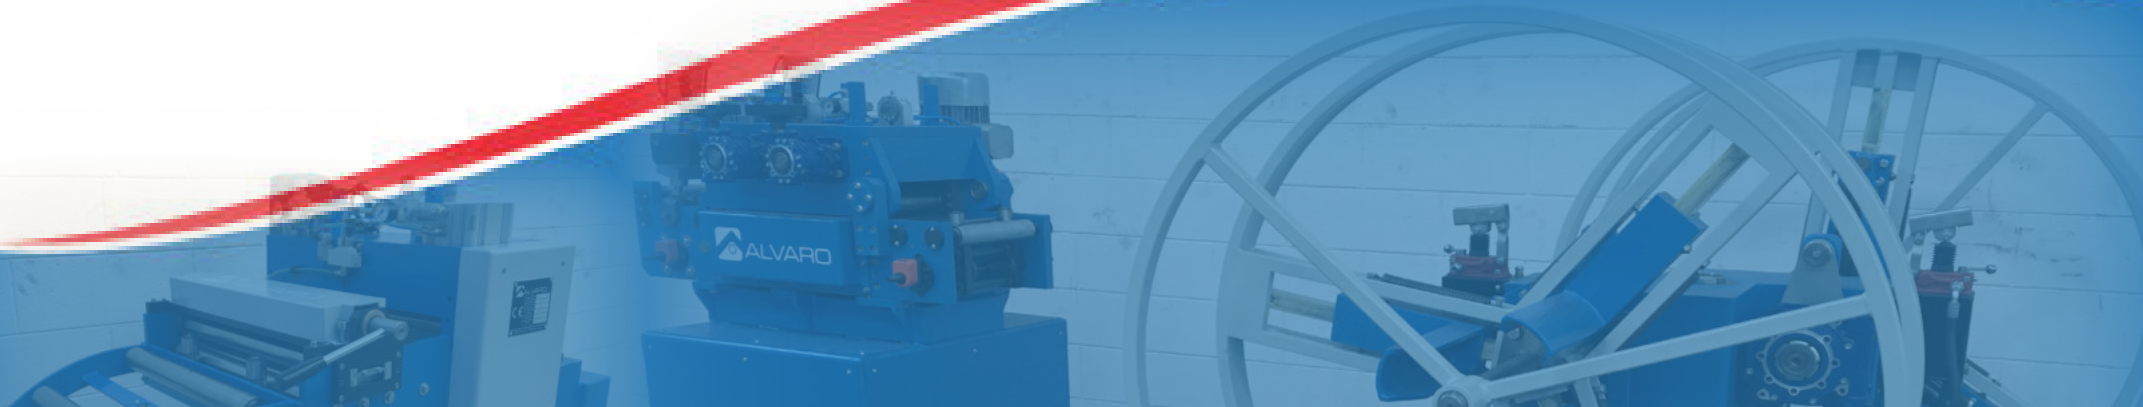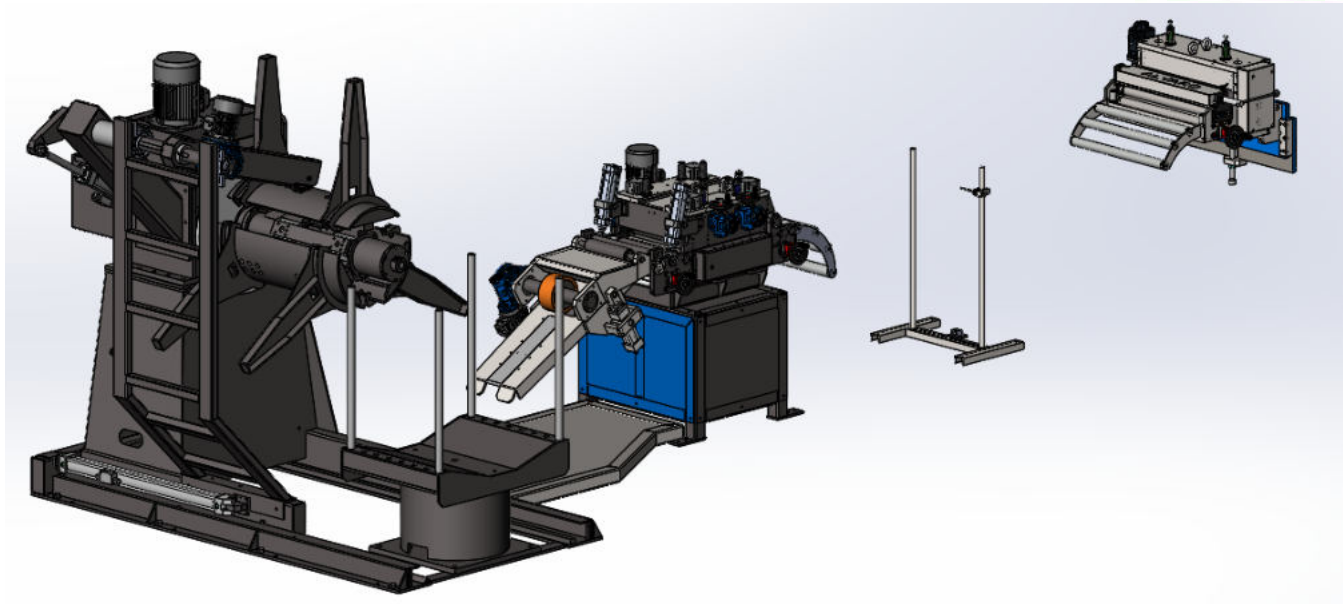

9 NOTCHING LINE

